

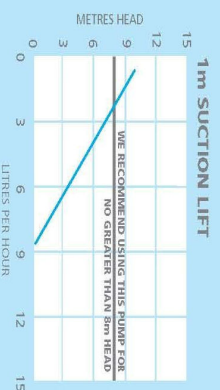


## TECHNICAL SPECIFICATIONS

- Pump rating: 230V AC, 16W
  - Alternative voltages available
  - 1PH 50HZ
  - 4A volt-free alarm wires, N.O., N.C., 230V
  - Hall effect semi conductor level sensors, with high level safety
  - Water flow rate: 14L/hr at zero head
  - Max. recommended head: 8m
  - 21dB(A) at 1m
- Max. water temperature: 40°C
  - Discharge tube: 6mm
  - Fully potted electronics
  - Thermally protected
  - CE marked

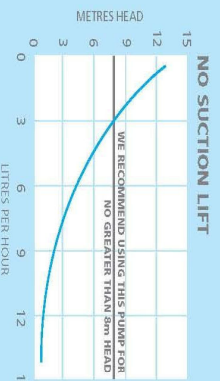

### SYSTEM LOCATION

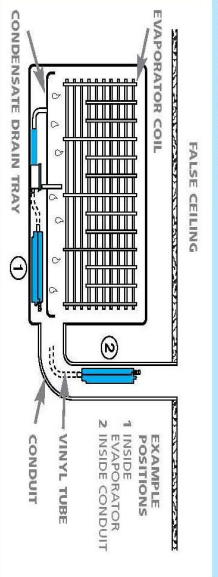

### PUMP DIMENSIONS

Product	Height	Width	Depth	Weight
MINI AQUA	28mm	165mm	28mm	0.18kg



## Mini Aqua

The Mini Aqua has been designed to fit in the smallest of spaces, giving the installation flexibility needed where the latest generation of A/C units are becoming even smaller. The Mini Aqua is designed to be installed:

- within wall mounted evaporators
- in plastic conduit

By connecting the drain hose to the reservoir and placing the pump drive

unit within the evaporator or conduit, condensate water can be pumped to a height of 8 metres.

**It's probably the smallest condensate pump in the world!**

