

Wall Mount 20




- **Float Switch Detection**
- **Simple and quick to install**
- **Anti-vibration**
- **Silent Operation**

Technical Data:

- Power supply : 100-240V AC 50/60Hz
- Max. flow : 20L/h (5.3GPH) @ 0 head
- Sound level : 18 dB(A) @1M (3.3ft)
- Max. discharge head : 20M (65.6ft)
- Water Storage : 230ml
- Max. unit output : 28kw / 95,550Btu/h
- Safety switch : 3A Normally closed
- Max. water temperature : 70°C
- Discharge tube : 6mmID
- Class : II appliance
- Rated : Continuous
- IP Protection : IPX5
- Fully potted : Yes
- LxWxH : 164mm x 70mm x 106mm

Typical Performance

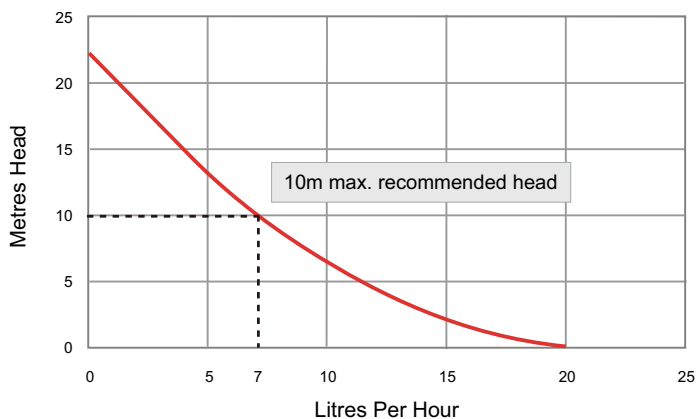

Dimension

