



AIR CONDITIONING



REFRIGERATION



HEATING



# Mini Aqua<sup>®</sup>

## CONDENSATE REMOVAL PUMP

The world's slimmest condensate removal pump is designed to fit where other's can't!



12L/h max. flow

10m max. rec. head  
(flow rate 6L/h)

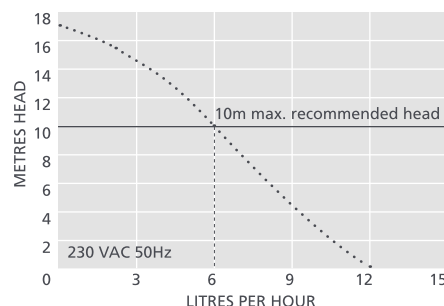
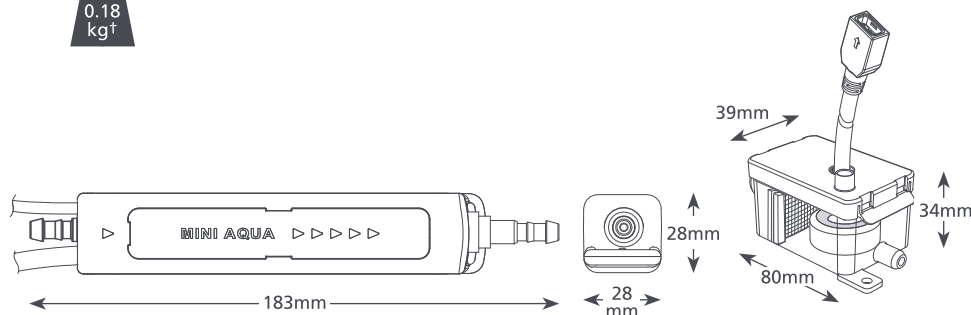
21dB(A) @ 1m

### KEY FEATURES

- Ultra slim
- High performance
- Plug & play
- Anti siphon device

### SUITABILITY

- Up to 16kW / 54,000Btu/h
- High wall mini split systems; Ducted units; Floor standing & Chassis units
- ✓ **Perfect for...** Installing directly inside the unit

0.18  
kg†

#### MINI AQUA @ 230 VAC 50Hz

|                    |                                       |
|--------------------|---------------------------------------|
| Max. flow          | 12L/h @ 0m head                       |
| Max. rec. head     | 10m                                   |
| Max. suction lift  | 2m                                    |
| dB(A) @ 1m         | 21                                    |
| Power supply       | 230 VAC,<br>0.1A, 16W, 50/60Hz        |
| Rated              | Non continuous                        |
| Class              | II appliance <input type="checkbox"/> |
| Max. unit output   | 16kW / 54,000Btu/h                    |
| Max. water temp    | 40°C / 104°F                          |
| Discharge tube     | 6mm ID                                |
| IP Protection      | IP24                                  |
| Safety switch      | 3.0A Normally closed                  |
| Thermal protection | ✓                                     |
| Fully potted       | ✓                                     |
| Self priming       | ✓                                     |

#### MINI AQUA OPTIONS

|                    |          |
|--------------------|----------|
| Mini Aqua (Europe) | FP2406/2 |
| † Pump only        |          |

#### SUGGESTED XTRA ACCESSORIES

| Description                   | Part No. |
|-------------------------------|----------|
| 1 Amp Fuse                    | FP2620   |
| Tube To Soil Stack Adaptor    | FP2038   |
| Vinyl Tube Braided 1/4" (6mm) | AX5100   |
| Inline Filter 16mm            | FP2640   |

#### IN THE BOX

Mini Aqua pump • 1.5m Plug & play power cable • Reservoir (inc. filter, float, lid) • 150mm Vinyl breather tube 6mm ID • Anti siphon device • 1.5m Suction tube 6mm ID • 220mm Blue inlet hose 14mm ID • Drain connector kit • Fixing kit • Install manual

Download manual at [aspenpumps.com](http://aspenpumps.com)View install video at [aspenpumps.com](http://aspenpumps.com)

For more installation accessories take a look at our Aspen Xtra range

Information correct at time of going to press.


[aspenpumps.com](http://aspenpumps.com)

+44 (0)1323 848842

[sales@aspenpumps.com](mailto:sales@aspenpumps.com)

reliable | silent | simple